

hest tools down the line.™

Continued next page

Drain-Rooter PH Units

Complete and Ready to Operate

Basic Units Include:

- Variable Speed Power Cable Feed
- Variable Speed Motor with Reverse Switch
- Water-Proof Air Foot Switch
- Quick Change Plastic Cartridge
- Four Foot Guide Hose

PH-DR-A with 50 ft. x 5/16" (50HE1-A-DH) cable.
Boxed Wt. 40 lbs.

PH-DR-B with 50 ft. x 5/16" (50HE1-AC) cable, and HECS cutter set.
Boxed Wt. 40 lbs.

PH-DR-C with 35 ft. x 3/8" (35HE2) cable, and HECS cutter set.
Boxed Wt. 38 lbs.

PH-DR-D with 50 ft. x 1/4" (50HE1-DH) cable.
Boxed Wt. 37 lbs.


FLEXICORE® CABLE



Wire Rope Center Construction

Heavy-gauge wire coiled tightly around 42-strand aircraft-type wire rope and heat treated. Has unequalled strength and the right amount of flexibility. So tough it carries a one-year warranty against defect or breakage.

Flexicore Patent Nos. 2,244,735 and 2,849,870

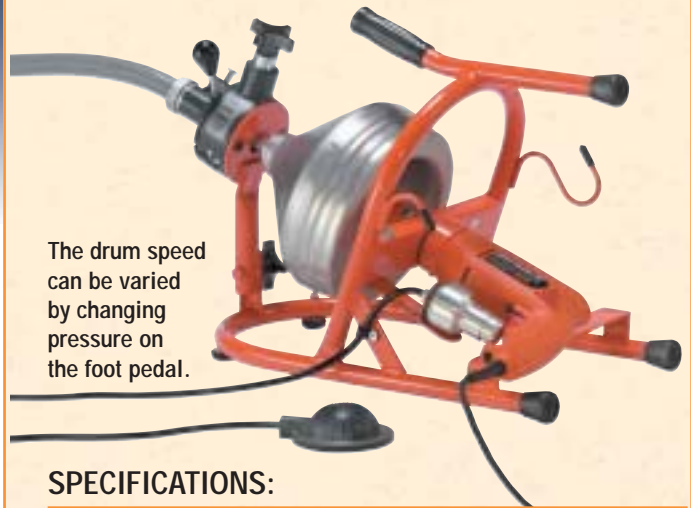

The drum speed can be varied by changing pressure on the foot pedal.

SPECIFICATIONS:

Weight:

Weight: 22 lbs. (10 kg) (without cable)

Dimensions:

22" deep x 13-1/2" wide x 15" high (without hose)
(56 cm x 34 cm x 38 cm)

Drum:

Heavy gauge stamped aluminum with inner drum to prevent cable tangling.

Capacity:

50 ft. of 1/4" or 5/16" cable; 35 ft. of 3/8" cable. All cables are left hand wound and reinforced with a wire rope center.

Power Cable Feed:

Drives 1/4", 5/16" and 3/8" cables.

Cutter Set:

See below.

Motor:

All ball-bearing, double insulated, reversible motor with speed control; 0-500 rpm, 230 and 240 volts available.

Foot Pedal:


Pneumatic foot pedal controls variable speed motor. Leaves operator's hands free to control cable.

Motor UL Registered

5-Piece Cutter Set *For Use Only With Cables Having Connectors*



AH
Arrow Head
Starting Drill



BG
Boring
Gimlet



DHBG
Down Head
Boring Gimlet



1-1/4 SCB
1-1/4" Side
Cutter Blade
(2 piece set)



FAH
Flexible Spring
Arrow Head
Cutter

The toughest tools down the line.™

General / **General Wire Spring Co.**
PIPE CLEANERS

1101 Thompson Avenue • McKees Rocks, PA 15136 USA
800-245-6200 or 412-771-6300 • Fax: 412-771-2771
www.drainbrain.com • e-mail: info@drainbrain.com